

Physical Specification (mm)

Nominal Voltage		12V
Nominal Capacity(20HR)		65Ah
Dimension	Length	269±2mm(10.59inches)
	Width	173±2mm(6.81inches)
	Container Height	203±2mm(7.99inches)
	Total Height(with Terminal)	224±2mm(8.82inches)
Weight With Acid		Approx 17.7Kg(39.0lbs)
Acid		1.280±0.015g/cm ³ (25°C)
Standard Terminal		1
Cell layout		0
Hold-Down		B1
Case		Black-Material (PP)
Cover		Black-Material (PP)
Handle		Black-Material (Nylon)


Electrical Specification

Rated Capacity	20 hour rate(3.25A)	65Ah
Reserve Capacity (CA)25A@10.5V		108min
Cold Cranking Performance Amps(CCA) @0°F(-18°C)		570A(SAE)

Standard Terminal (mm)

Terminal Type	D	
	Positive	Negative
1	19.5 ⁰ _{-0.3}	17.9 ⁰ _{-0.3}

Discharge Characteristics

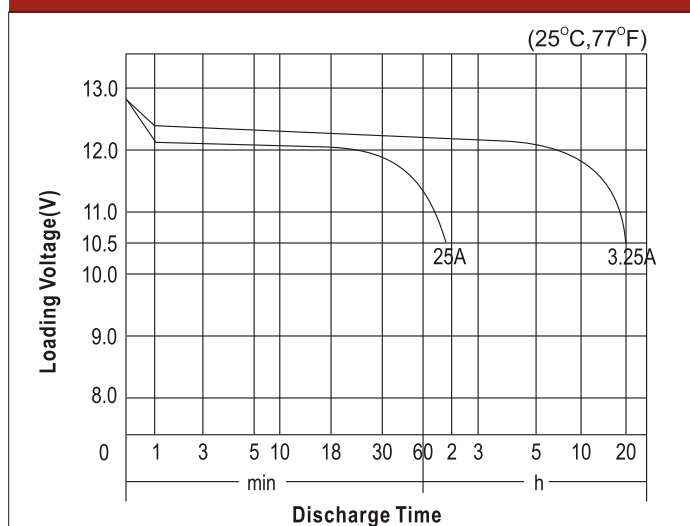


Specifications subject to change without notice

Automotive Battery


NS70L (12V65Ah)



Dimensions (mm)

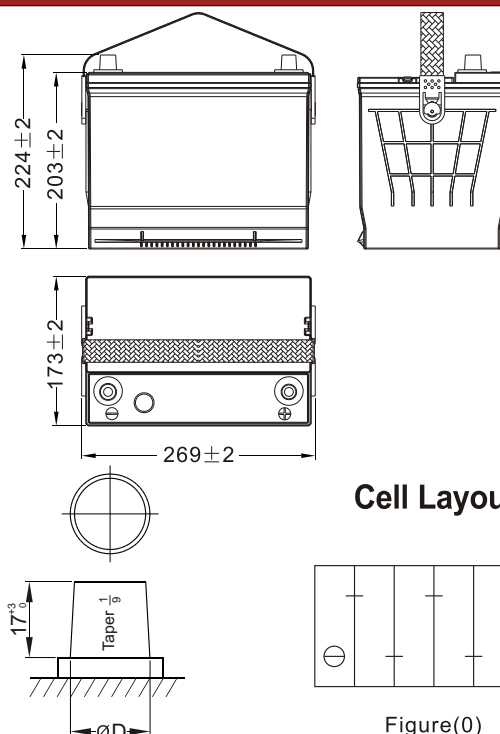

Discharge Characteristics

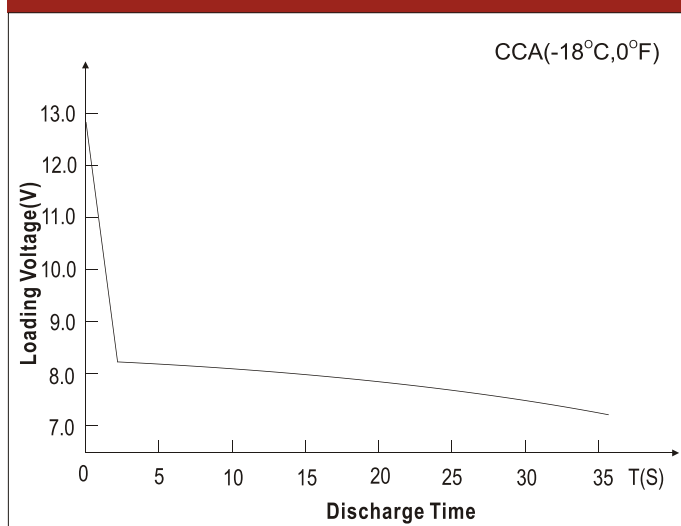

Publication No.:LB-QA-07-14