

Physical Specification (mm)

Nominal Voltage		12V
Nominal Capacity(20HR)		40Ah
Dimension	Length	237 ± 2mm(9.33inches)
	Width	128 ± 2mm(5.04inches)
	Container Height	200 ± 2mm(7.87inches)
	Total Height(with Terminal)	222 ± 2mm(8.74inches)
Weight With Acid		Approx 11.5Kg(25.4lbs)
Acid		1.280 ± 0.015g/cm ³ (25°C)
Standard Terminal		1
Cell layout		0
Hold-Down		B0
Case		Black-Material (PP)
Cover		Black-Material (PP)
Handle		Black-Material (PP)


Electrical Specification

Rated Capacity	20 hour rate(2.0A)	40Ah
Reserve Capacity (CA)25A@10.5V		61min
Cold Cranking Performance Amps(CCA) @0°F(-18°C)		400A

Standard Terminal (mm)

Terminal Type	D	
	Positive	Negative
1	19.5 ⁰ _{-0.3}	17.9 ⁰ _{-0.3}

Discharge Characteristics

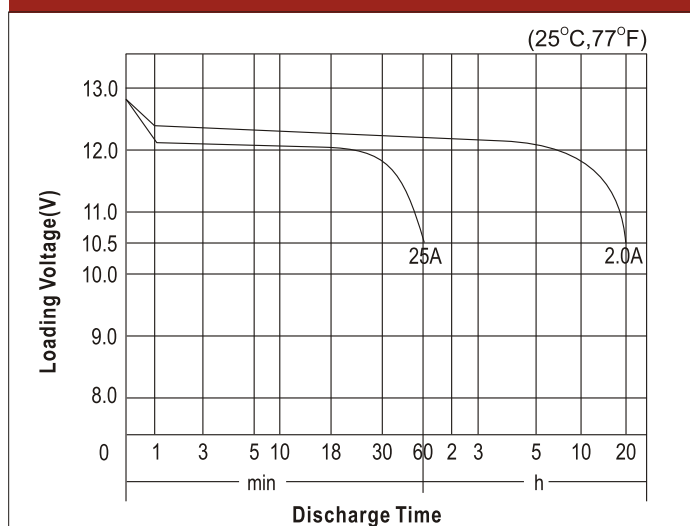


Specifications subject to change without notice

Automotive Battery


32B24LS [12V40Ah]



Dimensions (mm)

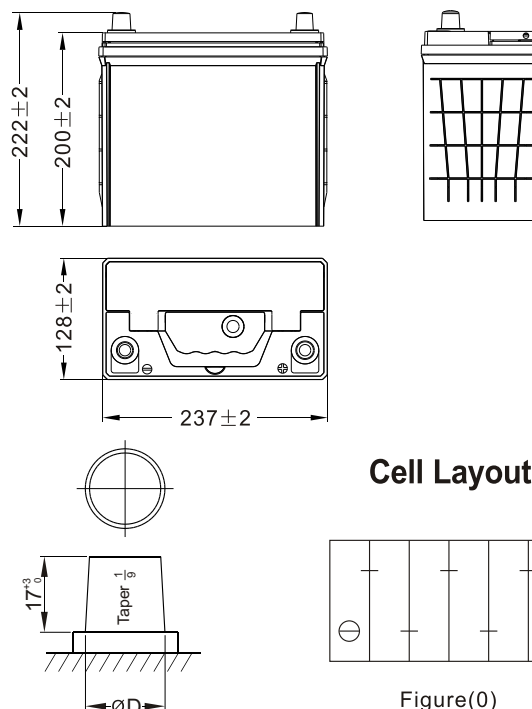

Discharge Characteristics

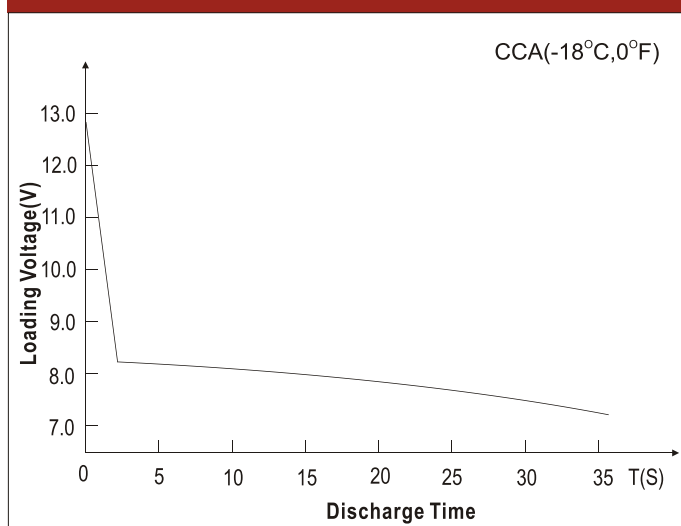

Publication No.:LB-QA-07-14